


WIRING CABLE GRAPHITE SHIELD 03.7 MM

CVS LK02N3

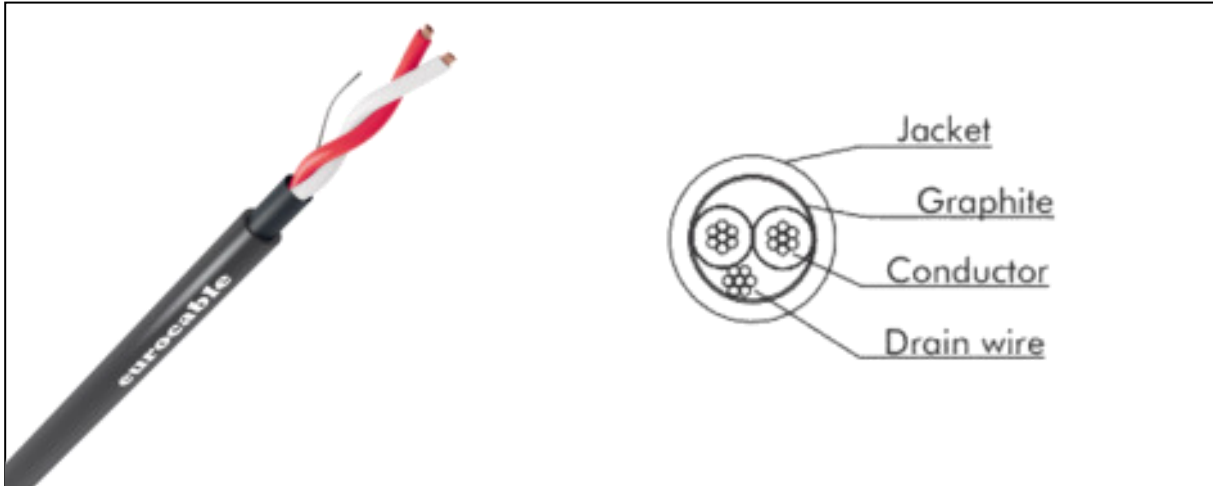

CVS LK02N3		
ELECTRICAL DATA		
D.C.R. at 20°C	Conductor	94 ohm/km
	Shield	
Capacitance at 1KHz	Cond/Cond	85 pF/m
	Cond/Sh	170 pF/m
Nominal Impedance 1 KHz		600 ohm/100m
Attenuation 1 KHz		
Inductance		
GENERAL DATA		
Cable	O.D.	3.70 mm
	Standard reels	
	Weight Kg/100m	
	Op. temp.	-20°C/+70°C
Jacket	Material	PVC TM2
	Nom. Thick.	0.50 mm
Shield	Material	Conductive graphite + drain wire
	Coverage	100%
Conductor	Qty	2
	Strand	7 x 0.20 mm
	Area/AWG	0.22 mm ² /24
	Insul. O.D.	1.00 mm
	Material	Electrolytic tinned copper