


# CAT6A SF/UTP ETHERNET + POWER HYBRID CABLES

CVS LK1CAT6SF \*\*/3

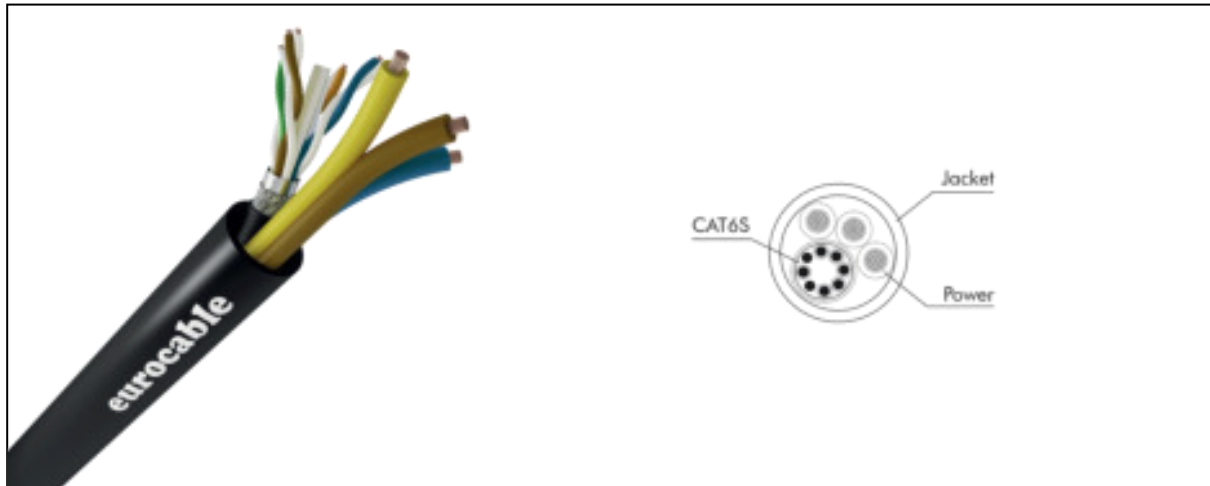

		CVS LK1CAT6SF 12/3		CVS LK1CAT6SF 16/3	
		3 x 3.30 mm <sup>2</sup>	CAT6A	3 x 1.50 mm <sup>2</sup>	CAT6A
<b>ELECTRICAL DATA</b>					
D.C.R. at 20° C		< 5.2 ohm/Km	-	< 13.3 ohm/Km	-
Test voltage		2000 Vca x 1' cond/cond	-	2000 Vca x 1' cond/cond	-
		2000 Vca x 1' cond/shield	-	2000 Vca x 1' cond/shield	-
<b>GENERAL DATA</b>					
Cable	O.D.	15.30 mm		13.40 mm	
	Material	PVC (TM2)			
	Weight Kg/100 m	33.70		23.80	
Shield	Material	-	I Aluminium polyester tape II Annealed tinned copper braid	-	I Aluminium polyester tape II Annealed tinned copper braid
	O.D. wire	-	0.10 mm	-	0.10 mm
	Coverage	-	100%	-	100%
		-	> 80%	-	> 80%
	Wrapping	-	Polyester tape	-	Polyester tape
Conductor	Single conductor O.D.	68 x 0.25 mm/12 AWG	4 x 2 x 23 AWG	46 x 0.20 mm/16 AWG	4 x 2 x 23 AWG
		2.37 mm	0.57 mm	1.60 mm	0.57 mm
	Material	Annealed red copper	Bare copper wire	Annealed red copper	Bare copper wire
		PVC insulated	Polyethylene insulated	PVC insulated	Polyethylene insulated