


WIRING CABLE ALUMINIUM SHIELD 04.3 MM

CVS LKDD02A

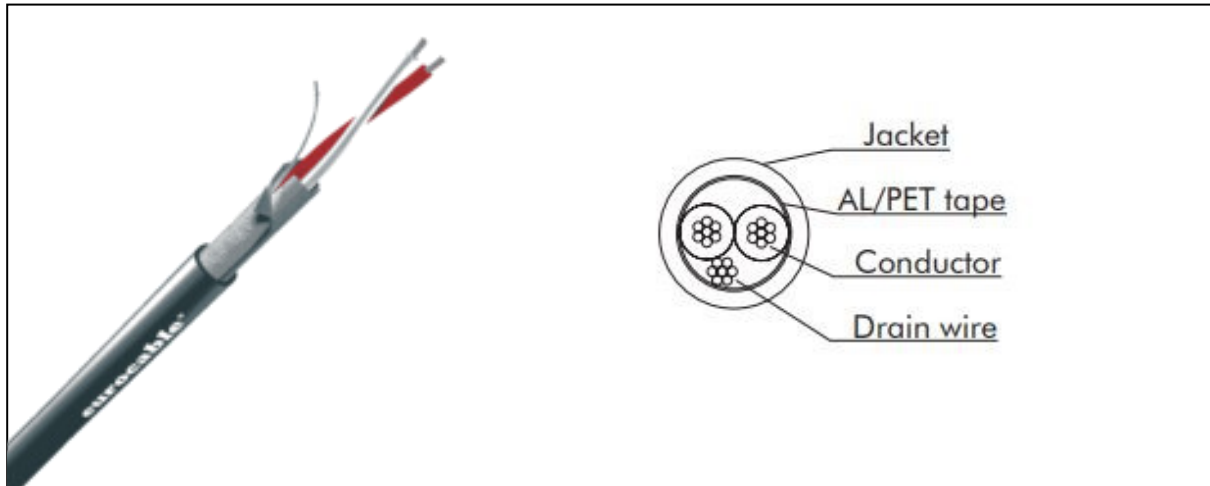

CVS LKDD02A		
ELECTRICAL DATA		
D.C.R. at 20°C	Conductor	94 ohm/km
	Shield	
Capacitance at 1KHz	Cond/Cond	70 pF/m
	Cond/Sh	
Nominal Impedance 1 KHz		
Attenuation 1 KHz		
Inductance		
GENERAL DATA		
Cable	O.D.	4.30 mm (± 0.2 mm)
	Standard reels	
	Weight Kg/100m	
	Op. temp.	-20°C/+70°C
Jacket	Material	PVC TM2
	Nom. Thick.	0.50 mm
Shield	Material	Aluminium/PET tape + drain wire
	Coverage	100%
Conductor	Qty	2
	Strand	7 x 0.20 mm
	Area/AWG	0.22 mm ² /24
	Insul. O.D.	1.60 mm
	Material	Electrolytic tinned copper