


# DOUBLE PAIR DMX CABLE 20 AWG

## CVS LKDMX D L

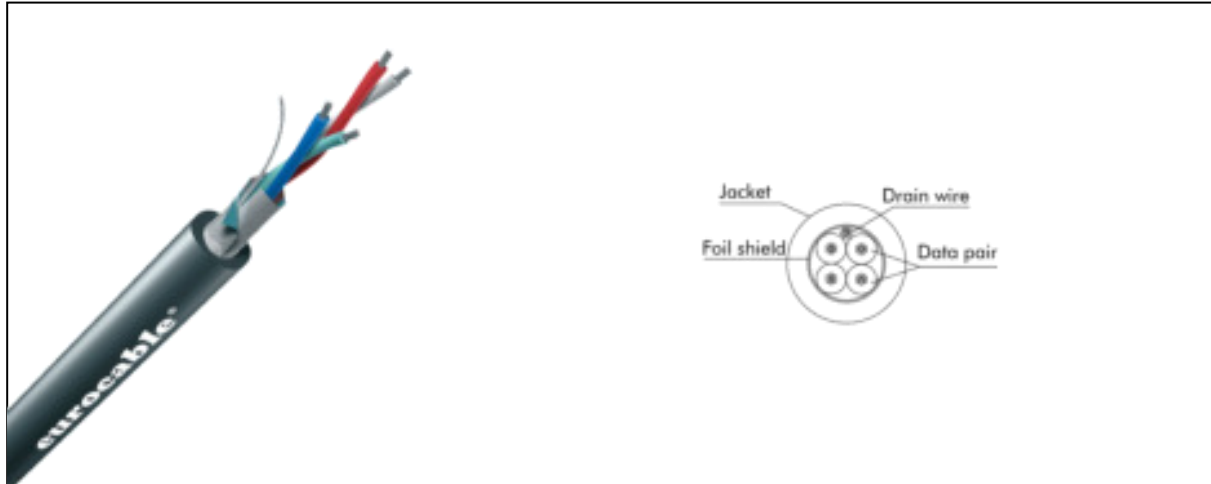

| CVS LKDMX D L *      |                         |  |
|----------------------|-------------------------|--|
| ELECTRICAL DATA      |                         |  |
| Description          | Double pair for DMX 512 |  |
| D.C.R.               | Conductor               | 32.5 ohm/km  |
| Capacitance<br>1 KHz | Conductor/Conductor     | 45 pF/m  |
|                      | Conductor/Shield        | 80 pF/m  |
| Nominal Impedance    | 110 ohm                 |  |
| Attenuation          | 1 KHz                   | 2 db/100 m   |
| Vel. of Prop.        | 80%                     |  |
| Inductance           | 60 $\mu$ H/100 m        |  |
| GENERAL DATA         |                         |  |
| Cable                | O.D.                    | 8.30 mm  |
|                      | Standard reels          | 500 m  |
|                      | Operating temperature   | -20°C/+70°C  |
| Jacket               | Material                | PVC Flame Retardant                                  |
|                      | Nominal Thickness       | 1.75 mm  |
| Shield               | Material                | Aluminium - Mylar foil                               |
|                      | Coverage                | 100%   |
| Conductor            | Quantity                | 2+2  |
|                      | Strand                  | 19 x 0.20 mm   |
|                      | Area/AWG                | 0.5 mm <sup>2</sup> /20                              |
|                      | Insulation O.D.         | 2.00 mm  |
|                      | Material                | Annealed tinned copper foamed polyethylene insulated |