


# RG58 ANALOG COAXIAL VIDEO CABLE

## CVS LKRG58C17

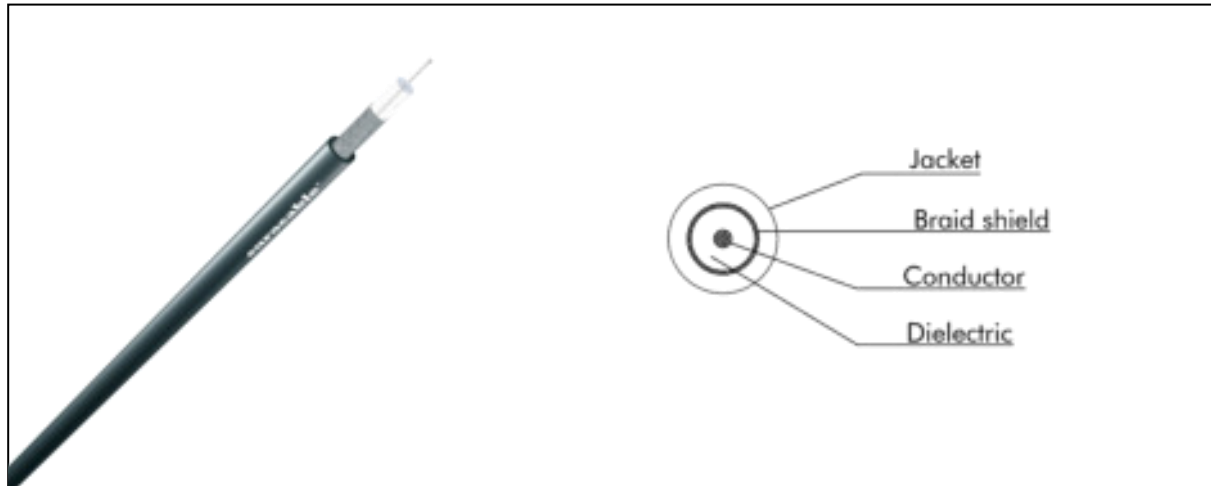

CVS LKRG58C17		
ELECTRICAL DATA		
D.C.R. at 20°C	Conductor	36.50 ohm/km
	Shield	14 ohm/km
Capacitance at 20°C		100 pF/m
Nominal Impedance		50 ohm
Attenuation	10 MHz	4.10 db/100 m
	50 MHz	9.70 db/100 m
	100 MHz	13.90 db/100 m
	200 MHz	20.40 db/100 m
Vel. of Prop.		66%
GENERAL DATA		
Cable	O.D.	5.00 mm
	Standard reels	1000 m
	Weight Kg/100m	4.00
	Operating temperature	-20°C/+70°C
Jacket	Material	PVC
	Nominal Thickness	0.75 mm
Shield	Material	Tinned copper
		Braid shield
	Coverage	95%
Conductor	Quantity	1
	Strand	19 x 0.18 mm
	Area/AWG	0.48 mm <sup>2</sup> /25
	Dielectric O.D.	2.95 mm
	Material	Annealed tinned copper, polyethylene insulated