


RG59 HDTV DIGITAL COAXIAL VIDEO CABLE

CVS LKRG59DS

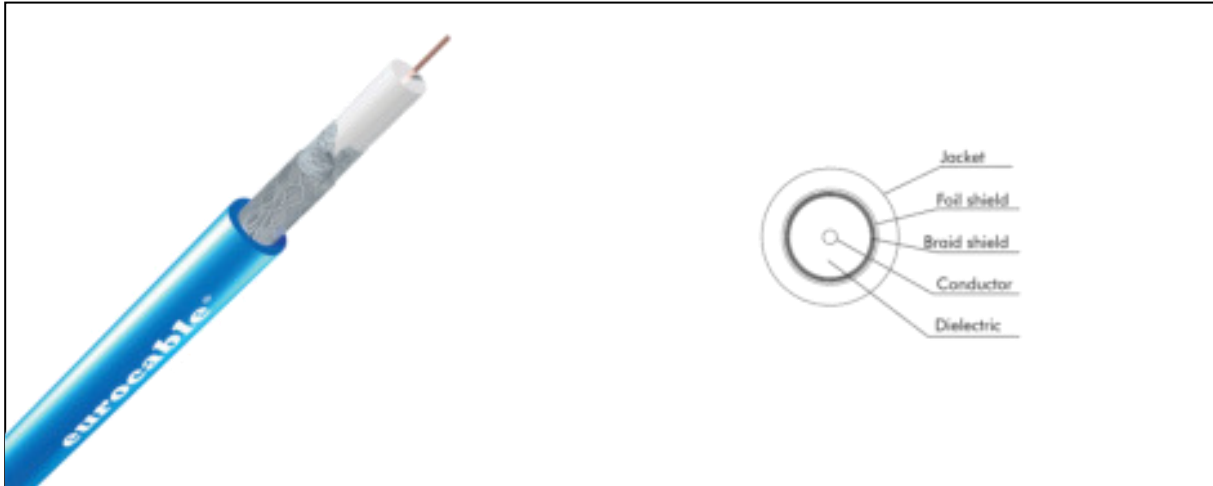

CVS LKRG59DS		
ELECTRICAL DATA		
D.C.R. at 20°C	Conductor	35 ohm/km
	Shield	9 ohm/km
Capacitance		-
Nominal Impedance		75 ohm
Attenuation db/100 m - MHz		5.4 at 50 / 10.6 at 200 / 16.4 at 470 / 22.7 at 860 / 25 at 1000 / 29.4 at 1350 / 33.9 at 1750 / 38.1 at 2250 / 46 at 3000
Vel. of Prop.		84%
GENERAL DATA		
Cable	O.D.	6.00 mm
	Standard reels	1000 m
	Weight Kg/100m	5,40
	Operating temperature	-30°C/+70°C
Jacket	Material	Low smoke emission PVC
	Nominal Thickness	0.80 mm
Shield	Material	First: Aluminium foil Second: Tinned copper braid
	Coverage	First: 100% - Second: 96%
Conductor	Quantity	1
	Strand	1 x 0.80 mm
	Area/AWG	0.50 mm ² /20
	Dielectric O.D.	3.65 mm
	Material	Solid bare copper, foamed polyethylene insulated