


# RX75 MINIATURE HDTV DIGITAL VIDEO CABLE

## CVS LKRX75S2

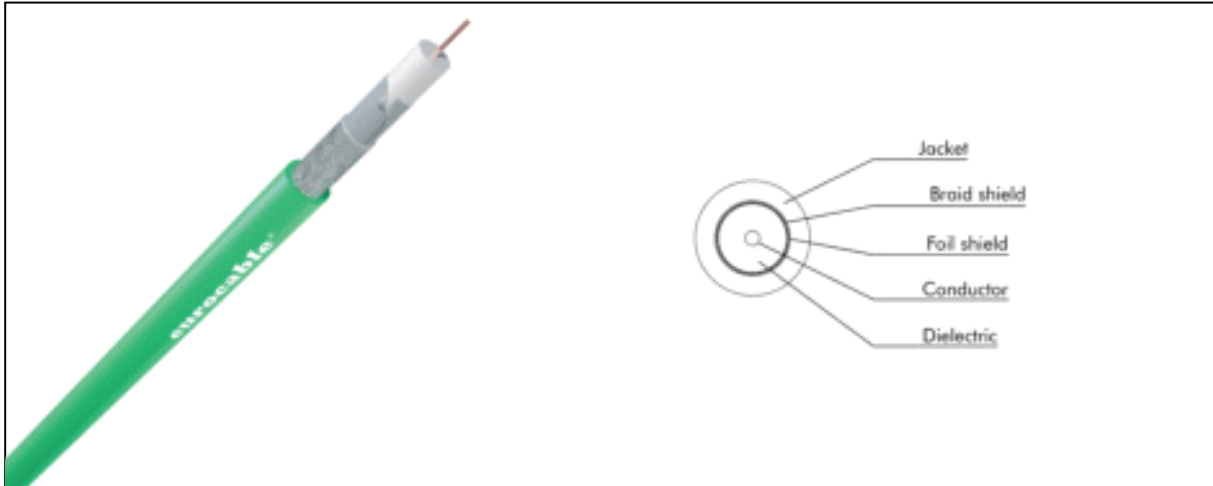

CVS LKRX75S2		
ELECTRICAL DATA		
D.C.R. at 20°C	Conductor	62 ohm/km
	Shield	12.8 ohm/km
Capacitance at 20°C		56 pF/m
Nominal Impedance		75 ohm
Attenuation db/100 m - MHz		7.3 at 50 / 16.9 at 230 / 21.4 at 470 / 32.9 at 1000 / 38.2 at 1350 / 41.1 at 1500 / 44.1 at 1750 / 49.7 at 2150 / 53.6 at 2400 / 61 at 3000
Vel. of Prop.		78%
GENERAL DATA		
Cable	O.D.	4.50 mm
	Standard reels	500 m
	Weight Kg/100m	3,00
	Operating temperature	-30°C/+70°C
Jacket	Material	Low smoke emission PVC
	Nominal Thickness	0.60 mm
Shield	Material	First: Aluminium - Mylar foil Second: Tinned copper braid
	Coverage	First: 100% - Second: 93%
Conductor	Quantity	1
	Strand	1 x 0.60 mm
	Area/AWG	0.28 mm <sup>2</sup> /23
	Dielectric O.D.	2.80 mm
	Material	Annealed solid bare copper, foamed polyolefine insulated