


RG59 ANALOG/DIGITAL COAXIAL VIDEO CABLE

CVS LKRG59S2A

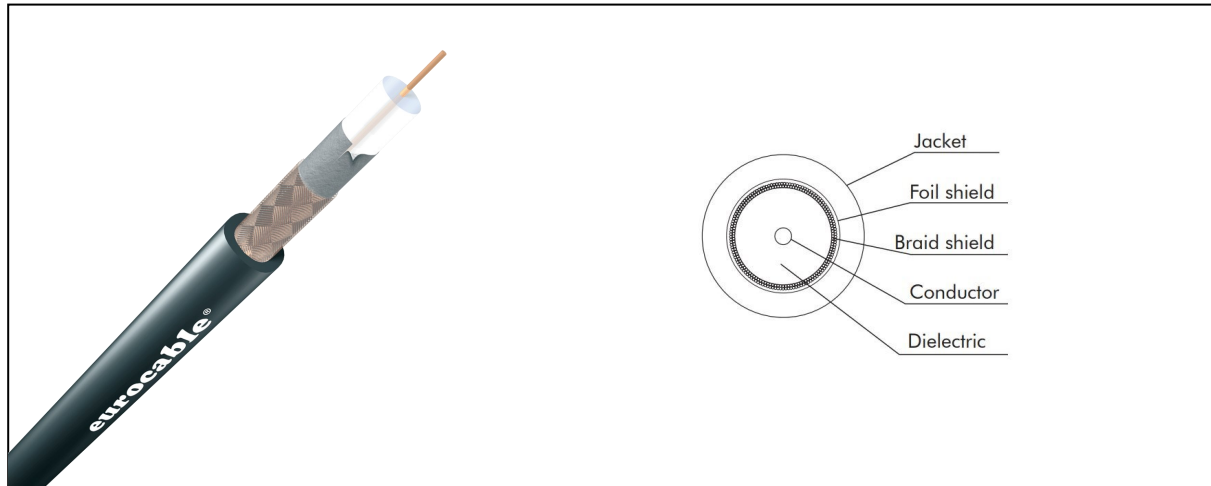

CVS LKRG59S2A			
ELECTRICAL DATA			
D.C.R. at 20°C	Conductor		62 ohm/km
	Shield		13 ohm/km
Capacitance at 20°C			67 pF/m
Nominal Impedance			75 ohm
Attenuation	10 MHz		-
	50 MHz		6.80 db/100 m
	100 MHz		-
	200 MHz		14.20 db/100 m
Vel. of Prop.			66%
GENERAL DATA			
Cable	O.D.		6.10 mm
	Standard reels		1000 m
	Weight	Kg/100m	4,98
	Operating temperature		-25°C/+80°C
Jacket	Material		Low smoke emission PVC
	Nominal Thickness		0.80 mm
Shield	Material		First: Aluminium-polyester-aluminium foil Second: Red copper braid
	Coverage		First: 100% - Second: 83%
Conductor	Quantity		1
	Strand		1 x 0.60 mm
	Area/AWG		0.28 mm ² /23
	Dielectric O.D.		3.70 mm
	Material		Bare copper, polyethylene insulated