


# RG6 HDTV 4K DIGITAL COAXIAL VIDEO CABLE

CVS LKRG6DS 4K

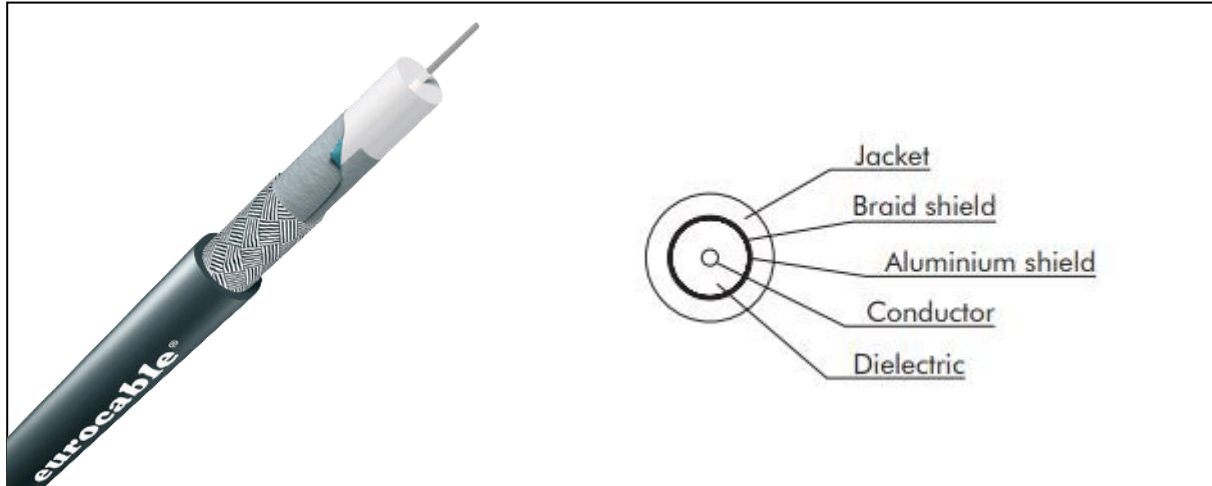

## GENERAL DATA

<b>Cable</b>	<b>O.D.</b>	6,96 mm
	<b>Weight</b>	67,5 gr/m
	<b>Operating temp.</b>	[-30°C +75°C]
<b>Jacket</b>	<b>Material</b>	PVC
<b>Shield</b>	<b>Material</b>	I) Tinned copper braid
		II) Aluminium + polyester + aluminium+ surlyne tape
	<b>Coverage</b>	I) 97 % II) 100 %
<b>Conductor</b>	<b>Strand [mm]</b>	1x1,01 mm
	<b>Dielect.O.D.</b>	4,57 mm
	<b>Material</b>	Silver plated copper

## ELECTRICAL DATA

<b>Nominal Impedance</b>	75 ohm
<b>Capacitance</b>	53 [pF/m]
<b>Vel. Of prop.</b>	84%
<b>Inner conductor resistance</b>	21,5 ohm/Km
<b>Outer conductor resistance</b>	7 ohm/Km
Frequency	<b>Attenuance [dB/100m]</b>
50 MHz	4,5
200 MHz	8,8
300 MHz	11
470 MHz	14
700 MHz	17,1
1000 MHz	20,8
1750 MHz	28,1
3000 MHz	37,9
4500 MHz	47,8